




EVAPORADORES INDUSTRIALES DE TECHO - SERIE SK

Ventiladores de alta velocidad 1.300 r.p.m.

MODELO SKS		Paso de aletas 3,5 mm.					
		SKS-30	SKS-35	SKS-44	SKS-51	SKS-60	SKS-68
Capacidad	ΔT 8°C - W	33.970	39.730	50.970	59.620	67.970	79.510
Dimensiones	A mm.	1.640	1.640	2.340	2.340	3.040	3.040
	B mm.	600	600	600	600	600	600
	C mm.	1.290	1.290	1.290	1.290	1.290	1.290
Superficie m ²		130,5	173,9	195,8	261,0	261,1	348,1
Volumen interior dm ³		27,5	36,5	40,0	54,8	52,8	71,4
Ventiladores	Caudal aire m ³ /h	16.900	16.400	25.350	24.600	33.800	32.800
	Flecha aire m.	13	12	13	12	13	12
	Nº x Ø (mm)	2x500	2x500	3x500	3x500	4x500	4x500
	Total Amperios I	2,7	2,7	4,05	4,05	5,4	5,4
Resistencias	Total W	1.560	1.560	2.340	2.340	3.120	3.120
	W.	13.200	13.200	19.200	19.200	24.000	24.000
Conexiones	Entrada Ø Pulg.	5/8"	7/8"	7/8"	7/8"	1 1/8"	1 3/8"
	Salida Ø Pulg.	1 1/8"	1 3/8"	1 3/8"	1 3/8"	1 5/8"	2 1/8"
	Desagüe Ø Pulg.	1 1/2"	2"	2"	2"	3"	3"
Desescarche Aire	Código	EV1250	EV1251	EV1252	EV1253	EV1254	EV1255
	€	8.182	9.137	10.695	11.686	13.792	15.142
Desescarche Eléctrico	Código	EV1265	EV1266	EV1267	EV1268	EV1269	EV1270
	€	9.710	10.683	12.565	13.573	16.464	17.815

Ventiladores de baja velocidad 1.000 r.p.m.

MODELO SKSB		Paso de aletas 3,5 mm.					
		SKSB-22	SKSB-26	SKSB-33	SKSB-37	SKSB-41	SKSB-49
Capacidad	ΔT 8°C - W	25.860	28.860	38.800	43.300	51.740	57.740
Dimensiones	A mm.	1.640	1.640	2.340	2.340	3.040	3.040
	B mm.	600	600	600	600	600	600
	C mm.	1.290	1.290	1.290	1.290	1.290	1.290
Superficie m ²		130,5	173,9	195,8	261,0	261,1	348,1
Volumen interior dm ³		27,5	36,5	40,0	54,8	52,8	71,4
Ventiladores	Caudal aire m ³ /h	10.800	9.700	16.200	14.550	21.600	19.400
	Flecha aire m.	11	10	11	10	11	10
	Nº x Ø (mm)	2x500	2x500	3x500	3x500	4x500	4x500
	Total Amperios I	1,88	1,88	2,82	2,82	3,76	3,76
Resistencias	Total W	1.100	1.100	1.650	1.650	2.200	2.200
	W.	13.200	13.200	19.200	19.200	24.000	24.000
Conexiones	Entrada Ø Pulg.	5/8"	7/8"	7/8"	7/8"	1 1/8"	1 3/8"
	Salida Ø Pulg.	1 1/8"	1 3/8"	1 3/8"	1 3/8"	1 5/8"	2 1/8"
	Desagüe Ø Pulg.	1 1/2"	2"	2"	2"	3"	3"
Desescarche Aire	Código	EV1340	EV1341	EV1342	EV1343	EV1344	EV1345
	€	8.182	9.137	10.695	11.686	13.792	15.142
Desescarche Eléctrico	Código	EV1350	EV1351	EV1352	EV1353	EV1354	EV1355
	€	9.710	10.683	12.565	13.573	16.464	17.815

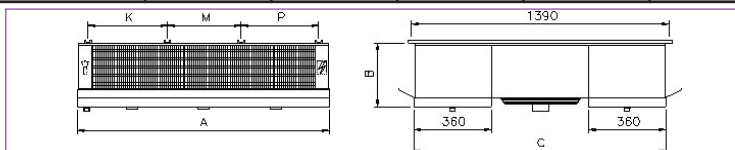




EVAPORADORES INDUSTRIALES DE TECHO - SERIE SK

Ventiladores de alta velocidad 1.300 r.p.m.

MODELO SKD		Paso de aletas 4,5 mm.					
		SKD-20	SKD-24	SKD-32	SKD-38	SKD-43	SKD-50
Capacidad	ΔT 8°C - W	24.360	28.510	36.560	42.780	48.740	57.050
Dimensiones	A mm.	1.640	1.640	2.340	2.340	3.040	3.040
	B mm.	600	600	600	600	600	600
	C mm.	1.290	1.290	1.290	1.290	1.290	1.290
Superficie m ²		102,9	137,3	154,5	206,0	206,0	274,7
Volumen interior dm ³		27,5	36,5	40,0	54,8	52,8	71,4
Ventiladores	Caudal aire m ³ /h	17.300	16.800	25.950	25.200	34.600	33.600
	Flecha aire m.	14	13	14	13	14	13
	Nº x Ø (mm)	2x500	2x500	3x500	3x500	4x500	4x500
	Total Amperios I	2,7	2,7	4,05	4,05	5,4	5,4
	Total W	1.560	1.560	2.340	2.340	3.120	3.120
Resistencias	W.	13.200	13.200	19.200	19.200	24.000	24.000
Conexiones	Entrada Ø Pulg.	5/8"	7/8"	7/8"	7/8"	1 1/8"	1 3/8"
	Salida Ø Pulg.	1 1/8"	1 3/8"	1 3/8"	1 3/8"	1 5/8"	2 1/8"
	Desagüe Ø Pulg.	1 1/2"	2"	2"	2"	3"	3"
Desescarche Aire	Código	EV1280	EV1281	EV1282	EV1283	EV1284	EV1285
	€	7.916	8.807	10.311	11.149	13.231	14.399
Desescarche Eléctrico	Código	EV1295	EV1296	EV1297	EV1298	EV1299	EV1300
	€	9.432	10.323	12.199	13.025	15.903	17.077

Ventiladores de baja velocidad 1.000 r.p.m.

MODELO SKDB		Paso de aletas 4,5 mm.					
		SKDB-16	SKDB-19	SKDB-23	SKDB-27	SKDB-31	SKDB-35
Capacidad	ΔT 8°C - W	19.290	21.660	28.950	32.500	38.620	43.350
Dimensiones	A mm.	1.640	1.640	2.340	2.340	3.040	3.040
	B mm.	600	600	600	600	600	600
	C mm.	1.290	1.290	1.290	1.290	1.290	1.290
Superficie m ²		102,9	137,3	154,5	206,0	206,0	274,7
Volumen interior dm ³		27,5	36,5	40,0	54,8	52,8	71,4
Ventiladores	Caudal aire m ³ /h	11.800	10.700	17.700	16.050	23.600	21.400
	Flecha aire m.	12	11	12	11	12	11
	Nº x Ø (mm)	2x500	2x500	3x500	3x500	4x500	4x500
	Total Amperios I	1,88	1,88	2,82	2,82	3,76	3,76
	Total W	1.100	1.100	1.650	1.650	2.200	2.200
Resistencias	W.	13.200	13.200	19.200	19.200	24.000	24.000
Conexiones	Entrada Ø Pulg.	5/8"	7/8"	7/8"	7/8"	1 1/8"	1 3/8"
	Salida Ø Pulg.	1 1/8"	1 3/8"	1 3/8"	1 3/8"	1 5/8"	2 1/8"
	Desagüe Ø Pulg.	1 1/2"	2"	2"	2"	3"	3"
Desescarche Aire	Código	EV1365	EV1366	EV1367	EV1368	EV1369	EV1370
	€	7.916	8.807	10.311	11.149	13.231	14.399
Desescarche Eléctrico	Código	EV1380	EV1381	EV1382	EV1383	EV1384	EV1385
	€	9.432	10.323	12.199	13.025	15.903	17.077

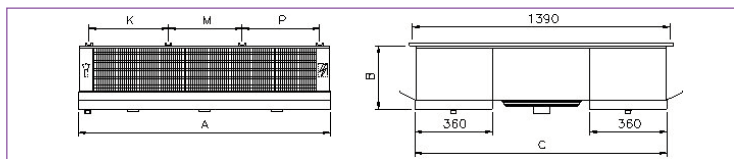



EVAPORADORES INDUSTRIALES DE TECHO - SERIE SK

Ventiladores de alta velocidad 1.300 r.p.m.

MODELO SKL		Paso de aletas 7 mm.							
		SKL-14	SKL-17	SKL-21	SKL-25	SKL-28	SKL-34	SKL-36	SKL-42
Capacidad	ΔT 8°C - W	15.370	18.060	23.070	27.090	30.770	36.140	38.880	45.690
Dimensiones	A mm.	1.640	1.640	2.340	2.340	3.040	3.040	3.840	3.840
	B mm.	600	600	600	600	600	600	600	600
	C mm.	1.290	1.290	1.290	1.290	1.290	1.290	1.290	1.290
Superficie m ²		68,5	91,4	102,9	137,2	137,2	183,0	176,5	235,3
Volumen interior dm ³		27,5	36,5	40,0	54,8	52,8	71,4	67,1	90,4
Ventiladores	Caudal aire m ³ /h	17.600	17.200	26.400	25.800	35.200	34.400	44.000	43.000
	Flecha aire m.	15	14	15	14	15	14	15	14
	Nº x Ø (mm)	2x500	2x500	3x500	3x500	4x500	4x500	5x500	5x500
	Total Amperios I	2,7	2,7	4,05	4,05	5,4	5,4	6,75	6,75
	Total W	1.560	1.560	2.340	2.340	3.120	3.120	3.900	3.900
Resistencias	W.	13.200	13.200	19.200	19.200	24.000	24.000	26.400	26.400
Conexiones	Entrada Ø Pulg.	5/8"	7/8"	7/8"	7/8"	1 1/8"	1 3/8"	1 1/8"	1 3/8"
	Salida Ø Pulg.	1 1/8"	1 3/8"	1 3/8"	1 3/8"	1 5/8"	2 1/8"	1 5/8"	2 1/8"
	Desagüe Ø Pulg.	1 1/2"	2"	2"	2"	3"	3"	3"	3"
Desescarche Aire	Código	EV1310	EV1311	EV1312	EV1313	EV1314	EV1315	EV1316	EV1317
	€	7.710	8.489	9.969	10.695	12.730	13.792	15.048	16.399
Desescarche Eléctrico	Código	EV1325	EV1326	EV1327	EV1328	EV1329	EV1330	EV1331	EV1332
	€	9.226	10.016	11.839	12.565	15.420	16.452	17.933	19.295

Ventiladores de baja velocidad 1.000 r.p.m.

MODELO SKLB		Paso de aletas 7 mm.							
		SKLB-10	SKLB-12	SKLB-15	SKLB-18	SKLB-22	SKLB-24	SKLB-27	SKLB-29
Capacidad	ΔT 8°C - W	12.360	14.210	18.550	21.310	24.730	28.430	31.270	35.940
Dimensiones	A mm.	1.640	1.640	2.340	2.340	3.040	3.040	3.840	3.840
	B mm.	600	600	600	600	600	600	600	600
	C mm.	1.290	1.290	1.290	1.290	1.290	1.290	1.290	1.290
Superficie m ²		68,5	91,4	102,9	137,2	137,2	183,0	176,5	235,3
Volumen interior dm ³		27,5	36,5	40,0	54,8	52,8	71,4	67,1	90,4
Ventiladores	Caudal aire m ³ /h	12.300	11.600	18.450	17.400	24.600	23.200	30.750	29.000
	Flecha aire m.	13	12	13	12	13	12	13	12
	Nº x Ø (mm)	2x500	2x500	3x500	3x500	4x500	4x500	5x500	5x500
	Total Amperios I	1,88	1,88	2,82	2,82	3,76	3,76	4,70	4,70
	Total W	1.100	1.100	1.650	1.650	2.200	2.200	2.750	2.750
Resistencias	W.	13.200	13.200	19.200	19.200	24.000	24.000	26.400	26.400
Conexiones	Entrada Ø Pulg.	5/8"	7/8"	7/8"	7/8"	1 1/8"	1 3/8"	1 1/8"	1 3/8"
	Salida Ø Pulg.	1 1/8"	1 3/8"	1 3/8"	1 3/8"	1 5/8"	2 1/8"	1 5/8"	2 1/8"
	Desagüe Ø Pulg.	1 1/2"	2"	2"	2"	3"	3"	3"	3"
Desescarche Aire	Código	EV1390	EV1391	EV1392	EV1393	EV1394	EV1395	EV1396	EV1397
	€	7.710	8.489	9.969	10.695	12.730	13.792	15.048	16.399
Desescarche Eléctrico	Código	EV1400	EV1401	EV1402	EV1403	EV1404	EV1405	EV1406	EV1407
	€	9.226	10.016	11.839	12.565	15.420	16.452	17.933	19.295

